


## DS-2CE55A2P(N)-VF

### 700TVL DIS Indoor IR Dome Camera

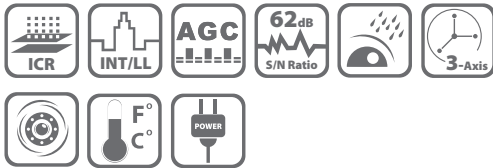


#### Key features

- 1/3" DIS Sensor
- 700 TVL horizontal resolution
- Day/Night auto switch
- 2.8 – 12mm vari-focal lens
- Wide operating temperature range

DS-2CE55A2P(N)-VF	
<b>Camera</b>	
Image Sensor	1/3" DIS
Signal System	PAL/NTSC
Effective Pixels	976(H)×496(V)
Min. Illumination	0.1 Lux @ (F1.2, AGC ON) 0.14 Lux @ (F1.4, AGC ON)
Shutter speed	PAL: 1/25 s to 1/100,000 s NTSC: 1/30 s to 1/100,000 s
Lens	2.8 - 12 mm @ F1.4 Angle of view: 80° - 27.2°
Lens Mount	φ14
Angle Adjustment	Pan: 0 - 355°, Tilt: 0 - 180°, Rotation: 0 - 355°
Day & Night	Electronic
Horizontal Resolution	700 TVL
Synchronization	Internal synchronization
Video Output	1Vp-p composite output (75 Ω/BNC)
S/N Ratio	More than 62 dB
<b>General</b>	
Working Temperature/ Humidity	-40 °C - 60 °C (-40 °F - 140 °F) Humidity 90% or less (non-condensing)
Power Supply	12 V DC
Power Consumption	Max. 0.8 W
Dimensions	Φ 136 × 101 mm (Φ 5.35" × 3.98")
Weight	500 g

#### Dimensions

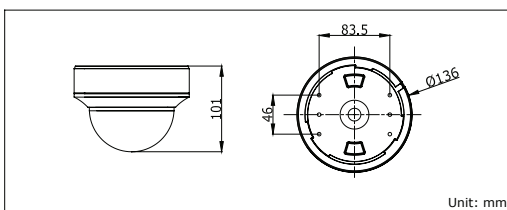

#### Order models

DS-2CE55A2P-VF  
DS-2CE55A2N-VF